


# Configuration Sheet

## Internal fitting kit (K1.2) layout



### LAYOUT

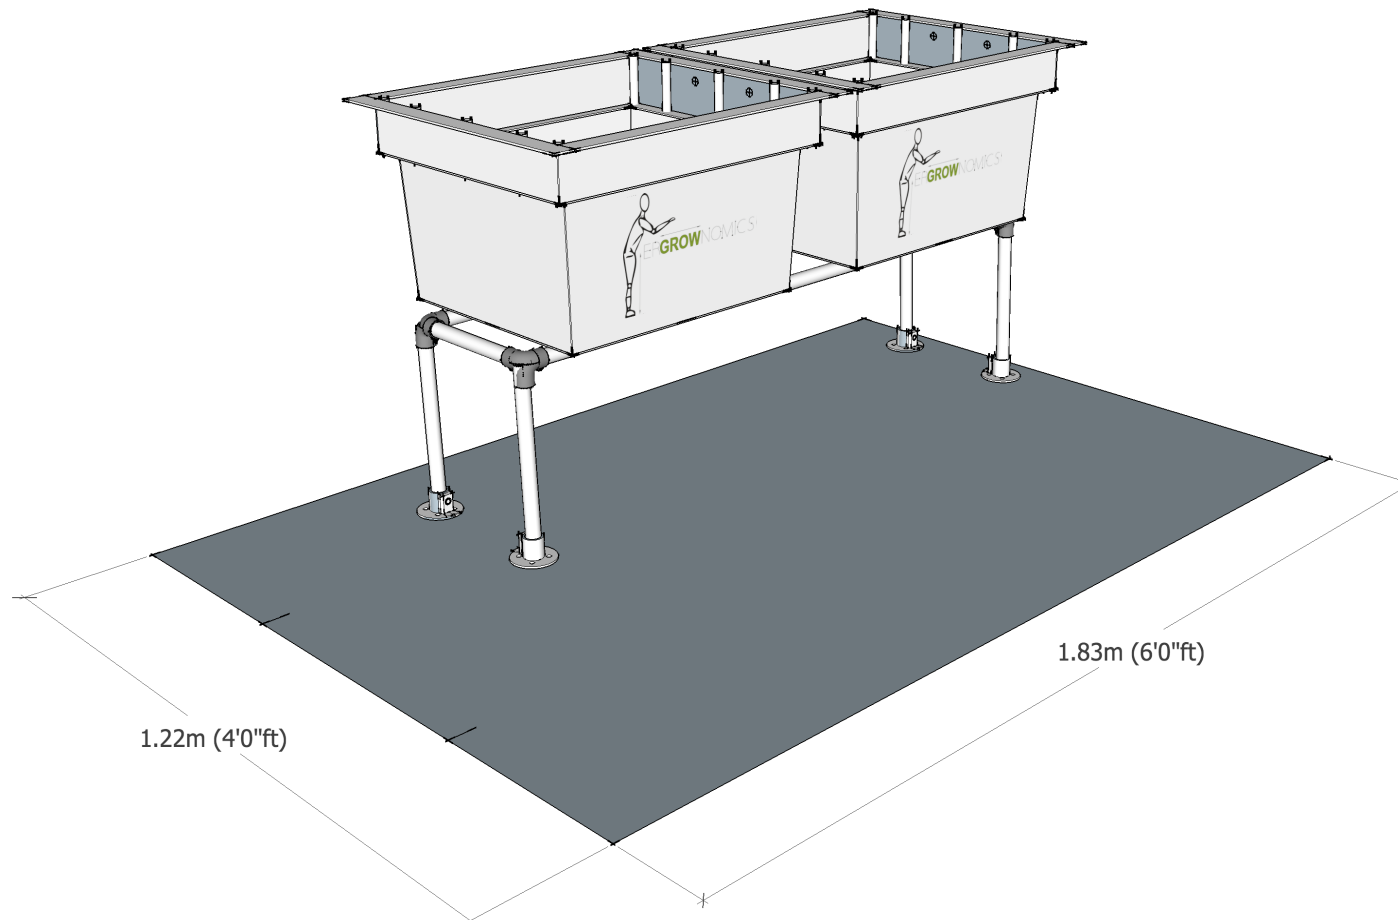

# Specification Sheet

## Internal fitting kit (K1.2) contents



### FRAME

Unit

Tubeclamp 3 way 90° degree elbow for 26.9 O/Dia pipe, double galvanised treatment with a gloss coloured powder coated finish as an option

4

Tubeclamp floor plate for 26.9 O/dia pipe, double galvanised treatment with a gloss coloured powder coated finish as an option

4

Rail type 1 (250 mm) in 26.9 O/dia double galvanised treatment with a gloss coloured powder coated finish as an option

2

Rail type 3 (630 mm) in 26.9 O/dia galvanised steel tube, with gloss coloured powder coated finish as an option

4

Hexagonal set screws (1/4" ductile carbon steel)

16

Hexagonal key ('L' shaped to DIN 11 with precision square cut ends for accurate contact to hex plug wall sides)

1

Tubeclamp straight fitting for 26.9 O/Dia pipe, with gloss coloured powder coated finish as an option

2

**FRAME LEG** each single frame planter pack to be supplied with a choice of the following leg options:

Standard length corner leg (350 mm) in 26.9 O/dia galvanised steel tube, double galvanised treatment with a gloss coloured powder coated finish as an option 4

Short length corner leg (250 mm) in 26.9 O/dia galvanised steel tube, double galvanised treatment with a gloss coloured powder coated finish as an option 4

Long length corner leg (450 mm) in 26.9 O/dia galvanised steel tube, double galvanised treatment with a gloss coloured powder coated finish as an option 4

**CONTAINER**

Horticultural container (667 mm (l) x 572 mm (w) x 390 mm (h) External dimensions) (85 litre soil capacity), bright coloured finish 2

**DRAINAGE**

Thermally bonded non woven geotextile membrane (110 grams m<sup>2</sup>) (510 mm (l) x 425 mm (w)) (0.22 m<sup>2</sup>) for lining base of container / protecting gravel bag 2

Heavy duty welded PVC mesh bag (550 grams m<sup>2</sup>) (570 mm (l) x 280 mm (w)) (0.16 m<sup>2</sup>) 2

## IRRIGATION

|   |   |
|---|---|
| Irrigation manifold - Type 1 comprised of Lock Type quick coupling fittings (16 mm external diameter) with threaded elbow and threaded tee joined by a 67 mm long 16 mm diameter medium duty black LDPE connector pipe interconnector and Garden 3/4 BSPF Tap Connector Male Brass QC end piece | 1 |
| Twin length (1278 mm) Rain Bird XF Series dripline 16 mm (external diameter) with emitters at 33 cm centres (2.3l/hr flow rate) for two horticultural containers  | 2 |
| Barbed plug 16 mm (external diameter) / 13.6 mm (internal diameter)   | 2 |
| Atelco 16 mm tubing clamp with ratchet closure to secure dripline over plug)  | 2 |

## PLANT TRAINING

|   |   |
|---|---|
| Adjustable support (aluminium) (12 mm diameter x 360 mm length)                             | 2 |
| Vinyl stop end to adjustable support to provide eye protection (10 mm x 25.40 mm S-Cap)     | 2 |
| Rubber-'O' ring (BS309 EPDM 70 ShA)   | 2 |
| Elastic supporting lines (1,240 mm length x 3.0 mm diameter) with short brass aglets fitted | 1 |
| Spherical cord lock black nylon for 3-4 mm diameter cord                                    | 1 |

Please note that this product specification is subject to change at the manufacturer's discretion.