
## Configuration Sheet

Internal fitting kit (K3.17) layout



LAYOUT

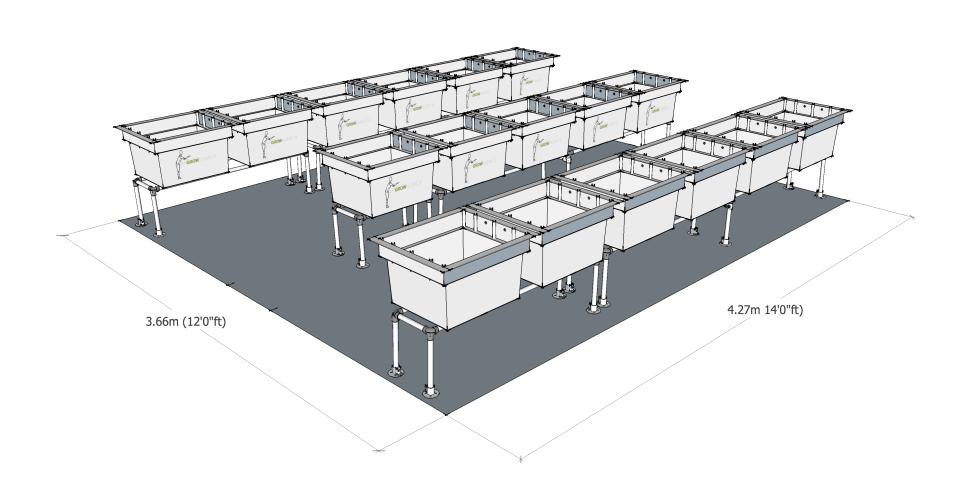

## Specification Sheet

Internal fitting kit (K3.17) contents



| PLANTERS   | Unit |
|--|------|
| One Planter (frame only)   | 1    |
| Two Planter (frame only)   | 2    |
| Four Planter (frame only)  | 3    |
| Horticultural container (577 mm (l) $\times$ 588 mm (w) $\times$ 385 mm (d) internal dimensions) (85 litre soil capacity)                              | 17   |
| Hexagonal key ('L' shaped 1/4" ductile carbon steel to DIN 11 with precision square cut ends for accurate contact to hex plug wall sides)              | 1    |
| DRAINAGE   |      |
| Thermally bonded non woven geotextile membrane (110 grams m2) (510 mm (l) x 425 mm (w)) (0.22 m2) for lining base of container / protecting 'bean bag' | 17   |
| Heavy duty PVC mesh bag (550 grams m2) (570 mm (l) x 280 mm (w) (0.16 m2) (gravel not supplied)  | 17   |

## IRRIGATION

| Lock Type fitting quick coupling - threaded elbow, 16 mm (external diameter)  | 3   |
|---|-----|
| Lock Type fitting quick coupling - threaded tee, 16 mm (external diameter)  | 5   |
| Standard length pipe interconnector to fittings along irrigation manifold (67 mm) Medium duty Rain<br>Bird LDPE 16mm solid black irrigation pipe (4 bar)                                | 3   |
| Medium duty Rain Bird LDPE 16mm solid black irrigation pipe (4 bar) for multiple rows of planter units.<br>(To be cut to length in situ) (m)  | 3.0 |
| Rain Bird XF Series dripline 16 mm (external diameter) with emitters at 33 cm centres (2.3l/hr flow rate) for multiple combinations of planter units. (To be cut to length in situ) (m) | 24  |
| Barbed plug 16 mm (external diameter) / 13.6 mm (internal diameter)   | 6   |
| Atelco 16 mm tubing clamp with ratchet closure to secure dripline over plug)  | 6   |
| Container top to floor short length pipe (0.8 m) Medium duty Rain Bird LDPE 16mm solid black irrigation pipe (4bar) for connection to external water supply                             | 1   |

## PLANT TRAINING

| Adjustable support (aluminium) (12 mm diameter x 360 mm length)                             | 2 |
|---|---|
| Vinyl stop end to adjustable support to provide eye protection (10 mm x 25.40 mm S-Cap)     | 2 |
| Rubber-'O' ring (BS309 EPDM 70 ShA)   | 2 |
| Elastic supporting lines (1,240 mm length x 3.0 mm diameter) with short brass aglets fitted | 1 |
| Spherical cord lock black nylon for 3-4 mm diameter cord                                    | 1 |

Please note that this product specification is subject to change at the manufacturer's discretion.