


Dimension Sheet


Four² Planter layout



SIDE VIEW

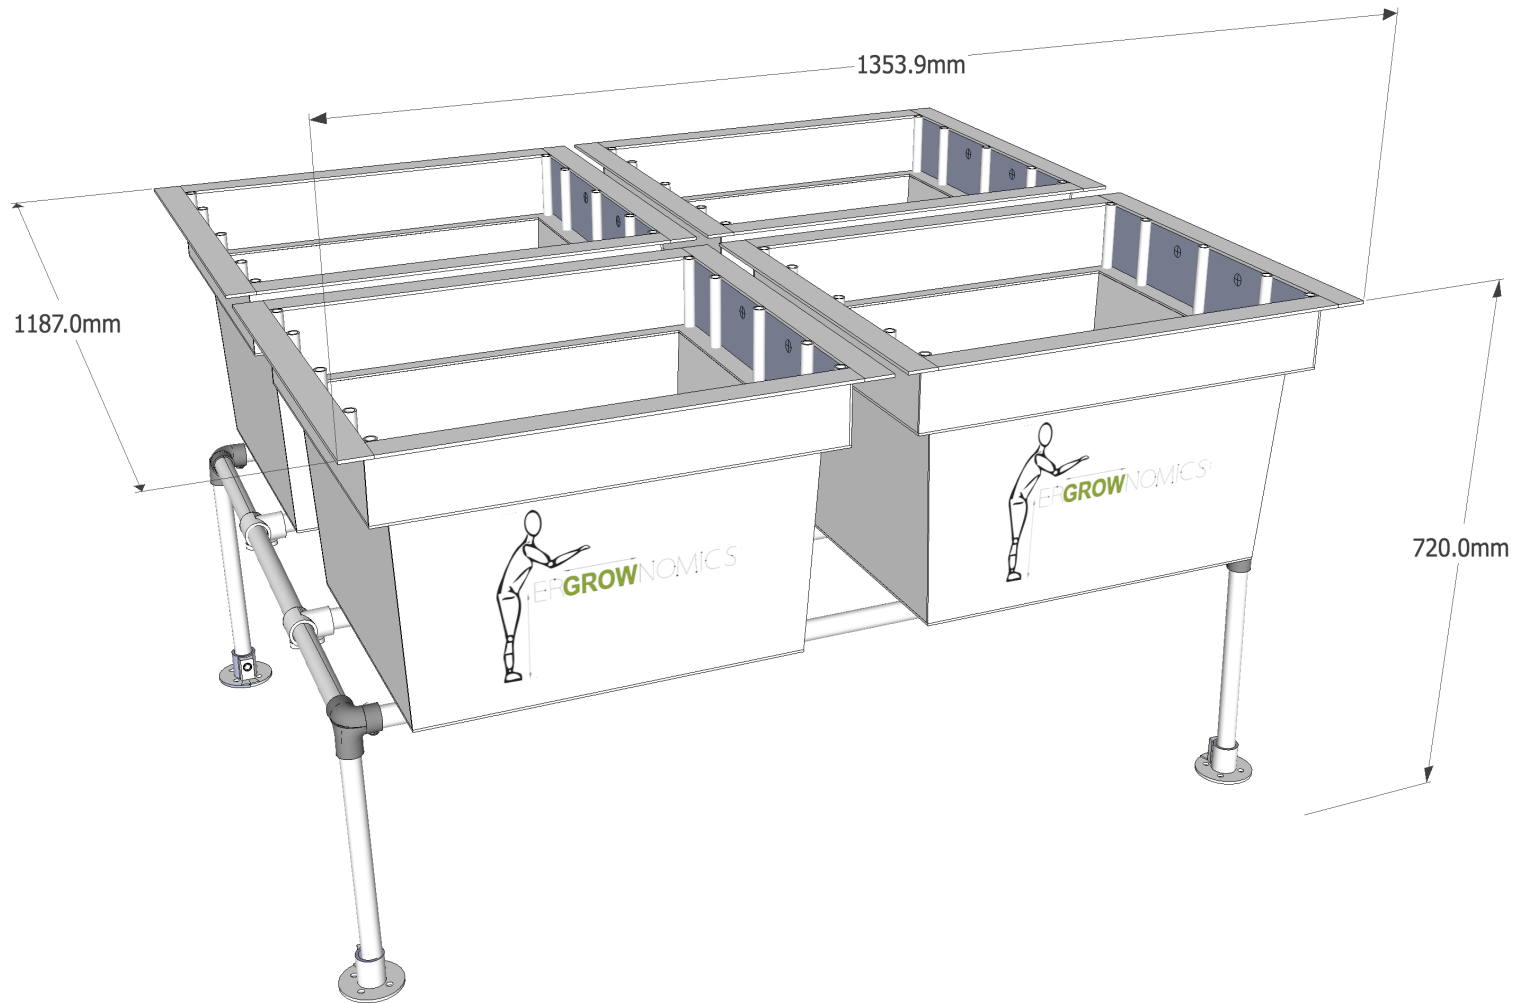

TOP VIEW

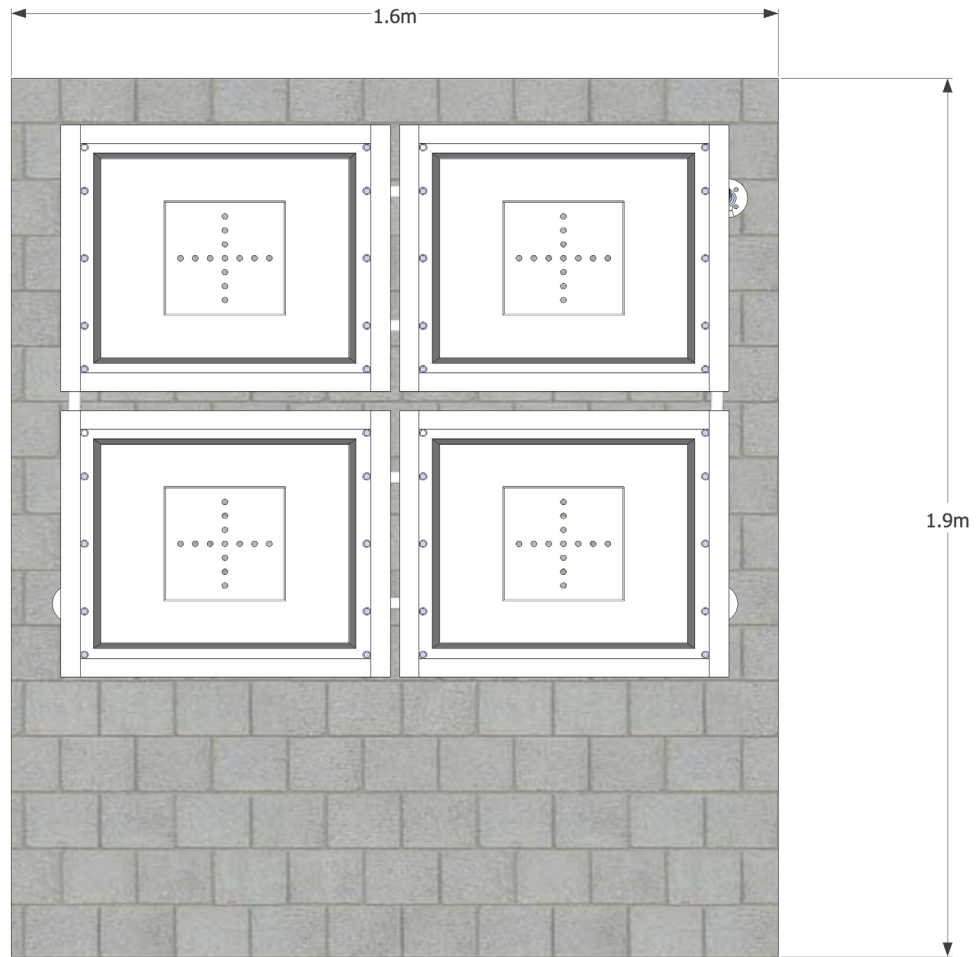

Specification Sheet

Four² Planter contents



FRAME

Unit

Tubeclamp 3 way 90° degree elbow for 26.9 O/Dia pipe, double galvanised treatment with a gloss coloured powder coated finish as an option	4
Tubeclamp short tee for 26.9 O/Dia pipe, double galvanised treatment with a gloss coloured powder coated finish as an option	4
Tubeclamp floor plate for 26.9 O/dia pipe, double galvanised treatment with a gloss coloured powder coated finish as an option	4
Rail type 3 (630 mm) in 26.9 O/dia galvanised steel tube, with gloss coloured powder coated finish as an option	8
Rail type 4 (424 mm) in 26.9 O/dia galvanised steel tube, with gloss coloured powder coated finish as an option	4
Hexagonal set screws (1/4" ductile carbon steel)	24
Hexagonal key ('L' shaped to DIN 11 with precision square cut ends for accurate contact to hex plug wall sides)	1
Tubeclamp straight fitting for 26.9 O/Dia pipe, with gloss coloured powder coated finish as an option	6

FRAME LEG each single frame planter pack to be supplied with a choice of the following leg options:

Standard length corner leg (350 mm) in 26.9 O/dia galvanised steel tube, double galvanised treatment with a gloss coloured powder coated finish as an option 6

Short length corner leg (250 mm) in 26.9 O/dia galvanised steel tube, double galvanised treatment with a gloss coloured powder coated finish as an option 6

Long length corner leg (450 mm) in 26.9 O/dia galvanised steel tube, double galvanised treatment with a gloss coloured powder coated finish as an option 6

CONTAINER

Horticultural container (667 mm (l) x 572 mm (w) x 390 mm (h) External dimensions) (85 litre soil capacity), bright coloured finish 4

DRAINAGE

Thermally bonded non woven geotextile membrane (110 grams m²) (510 mm (l) x 425 mm (w)) (0.22 m²) for lining base of container / protecting gravel bag 4

Heavy duty welded PVC mesh bag (550 grams m²) (570 mm (l) x 280 mm (w)) (0.16 m²) 4

Perlite - lightweight siliceous volcanic rock particles (1-5 mm grade) (4 litres) for addition to soil growing media 2

IRRIGATION

Irrigation manifold - Type 1 comprised of Lock Type quick coupling fittings (16 mm external diameter) with threaded elbow and threaded tee joined by a 67 mm long 16 mm diameter medium duty black LDPE connector pipe interconnector and Garden 3/4 BSPF Tap Connector Male Brass QC end piece	1
Irrigation manifold - Type 2 comprised of Lock Type quick coupling fittings (16 mm external diameter) with two threaded tees joined by a 67 mm long 16 mm diameter medium duty black LDPE connector pipe interconnector	1
Long length pipe connector 365 in length to bridge between containers 16 mm diameter medium duty black LDPE connector pipe with Lock type quick coupling ends	1
Twin length (1278 mm) Rain Bird XF Series dripline 16 mm (external diameter) with emitters at 33 cm centres (2.3l/hr flow rate) for two horticultural containers	4
Barbed plug 16 mm (external diameter) / 13.6 mm (internal diameter)	4
Atelco 16 mm tubing clamp with ratchet closure to secure dripline over plug)	4

PLANT TRAINING

Adjustable support (aluminium) (12 mm diameter x 360 mm length)	2
Vinyl stop end to adjustable support to provide eye protection (10 mm x 25.40 mm S-Cap)	2
Rubber-'O' ring (BS309 EPDM 70 ShA)	2
Elastic supporting lines (1,240 mm length x 3.0 mm diameter) with short brass aglets fitted	1
Spherical cord lock black nylon for 3-4 mm diameter cord	1

Please note that this product specification is subject to change at the manufacturer's discretion.